


USE PART NUMBER 27245-3T FOR ADDITIONAL PROBE & SHACKLE ASSEMBLY

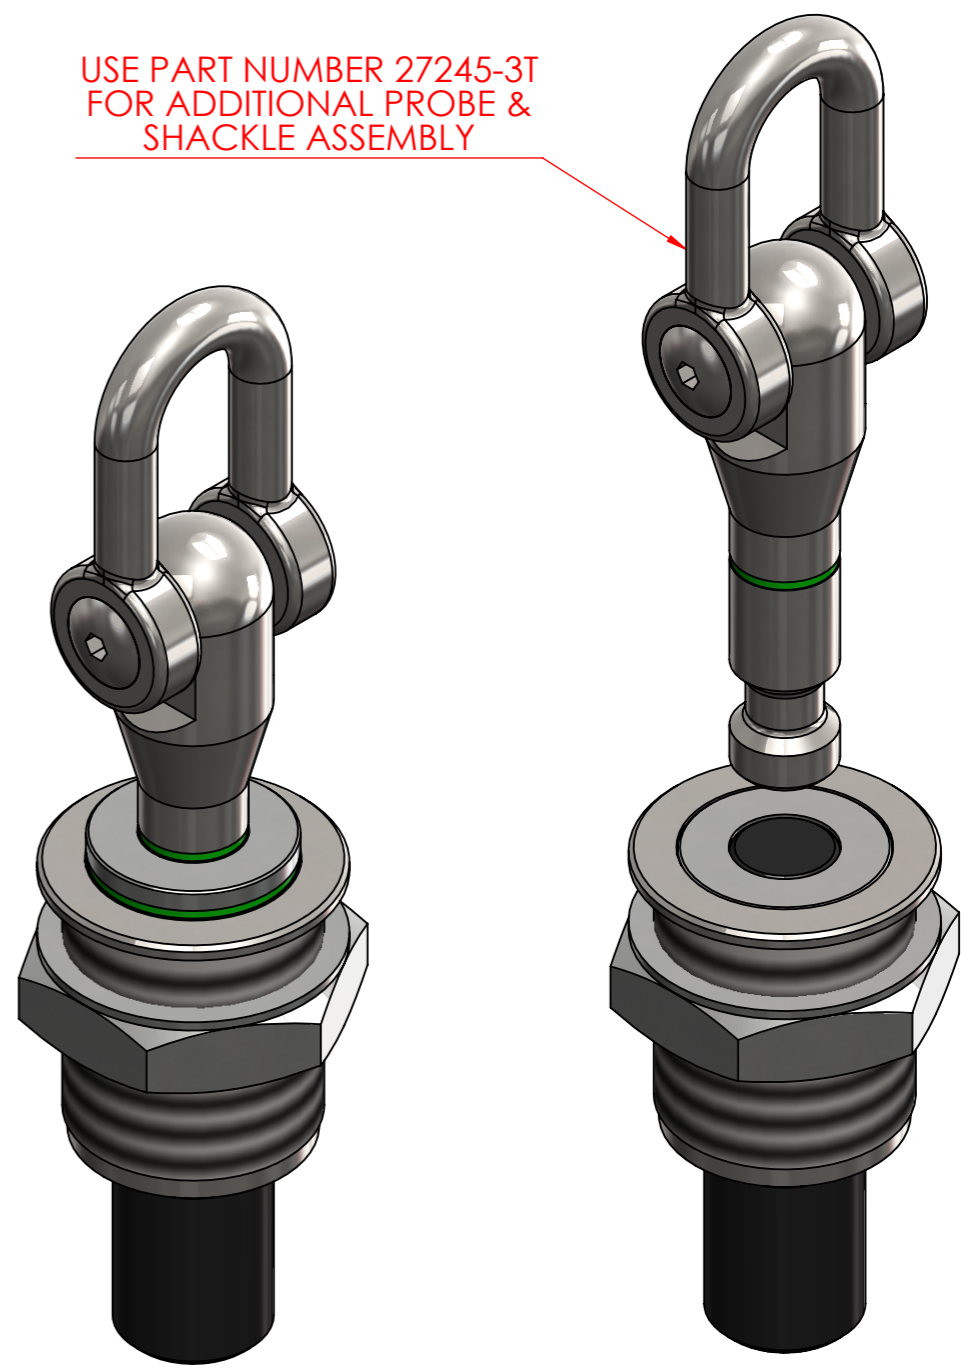

USE LOCTITE 243 ON INSTALLATION

2165-3T

3	S21728 - PRODUCTION UPDATES	24/11/2016	M.J.I
REV.	DESCRIPTION	DATE	APPROVED
		Date	Drawn by
		15/12/2002	J.R.C
		Approved by	E.W.
	3 TONNE MULTI-PURPOSE PLUG-IN CONNECTOR		
	Size	Scale	Sheet
	A3	2:3	1 of 2
	REMOVE ALL BURRS & SHARP EDGES		SALES TECHNICAL SHEET
	2165-3T		ISSUE No. 3

CRITICAL DIMENSIONS MARKED THUS: ()	All dimensions are in mm unless otherwise stated	GENERAL TOLERANCES unless otherwise stated
REFERENCE DETAILS MARKED THUS: ()		
Matl. Part No. -	WELD INSPECTION CLASS	Dimension - No decimal place ±1
Matl. Type -	Weld Performance Class	Dimension - One decimal place ±0.5
Matl. Size -	Standard EN 15085 -3 CP C2	Dimension - Two decimal places ±0.25
Finish - -	Weld Inspection Class - Steel	Angular Dimension ±1°
	BS EN ISO 5817 Class C	Weld Bead Length ±5
	Weld Inspection Class - Aluminium	Surface Flatness (inc. weld) ±0.5
Estimated Weight - 1.62 KG	BS EN ISO 10042:2005	
DO NOT SCALE IF IN DOUBT ASK	O/D - OUTSIDE DIM. I/D - INSIDE DIM.	OUTSIDE LOOKING IN
	ALL PARTS FREE FROM WELD SPLATTER	3RD ANGLE