


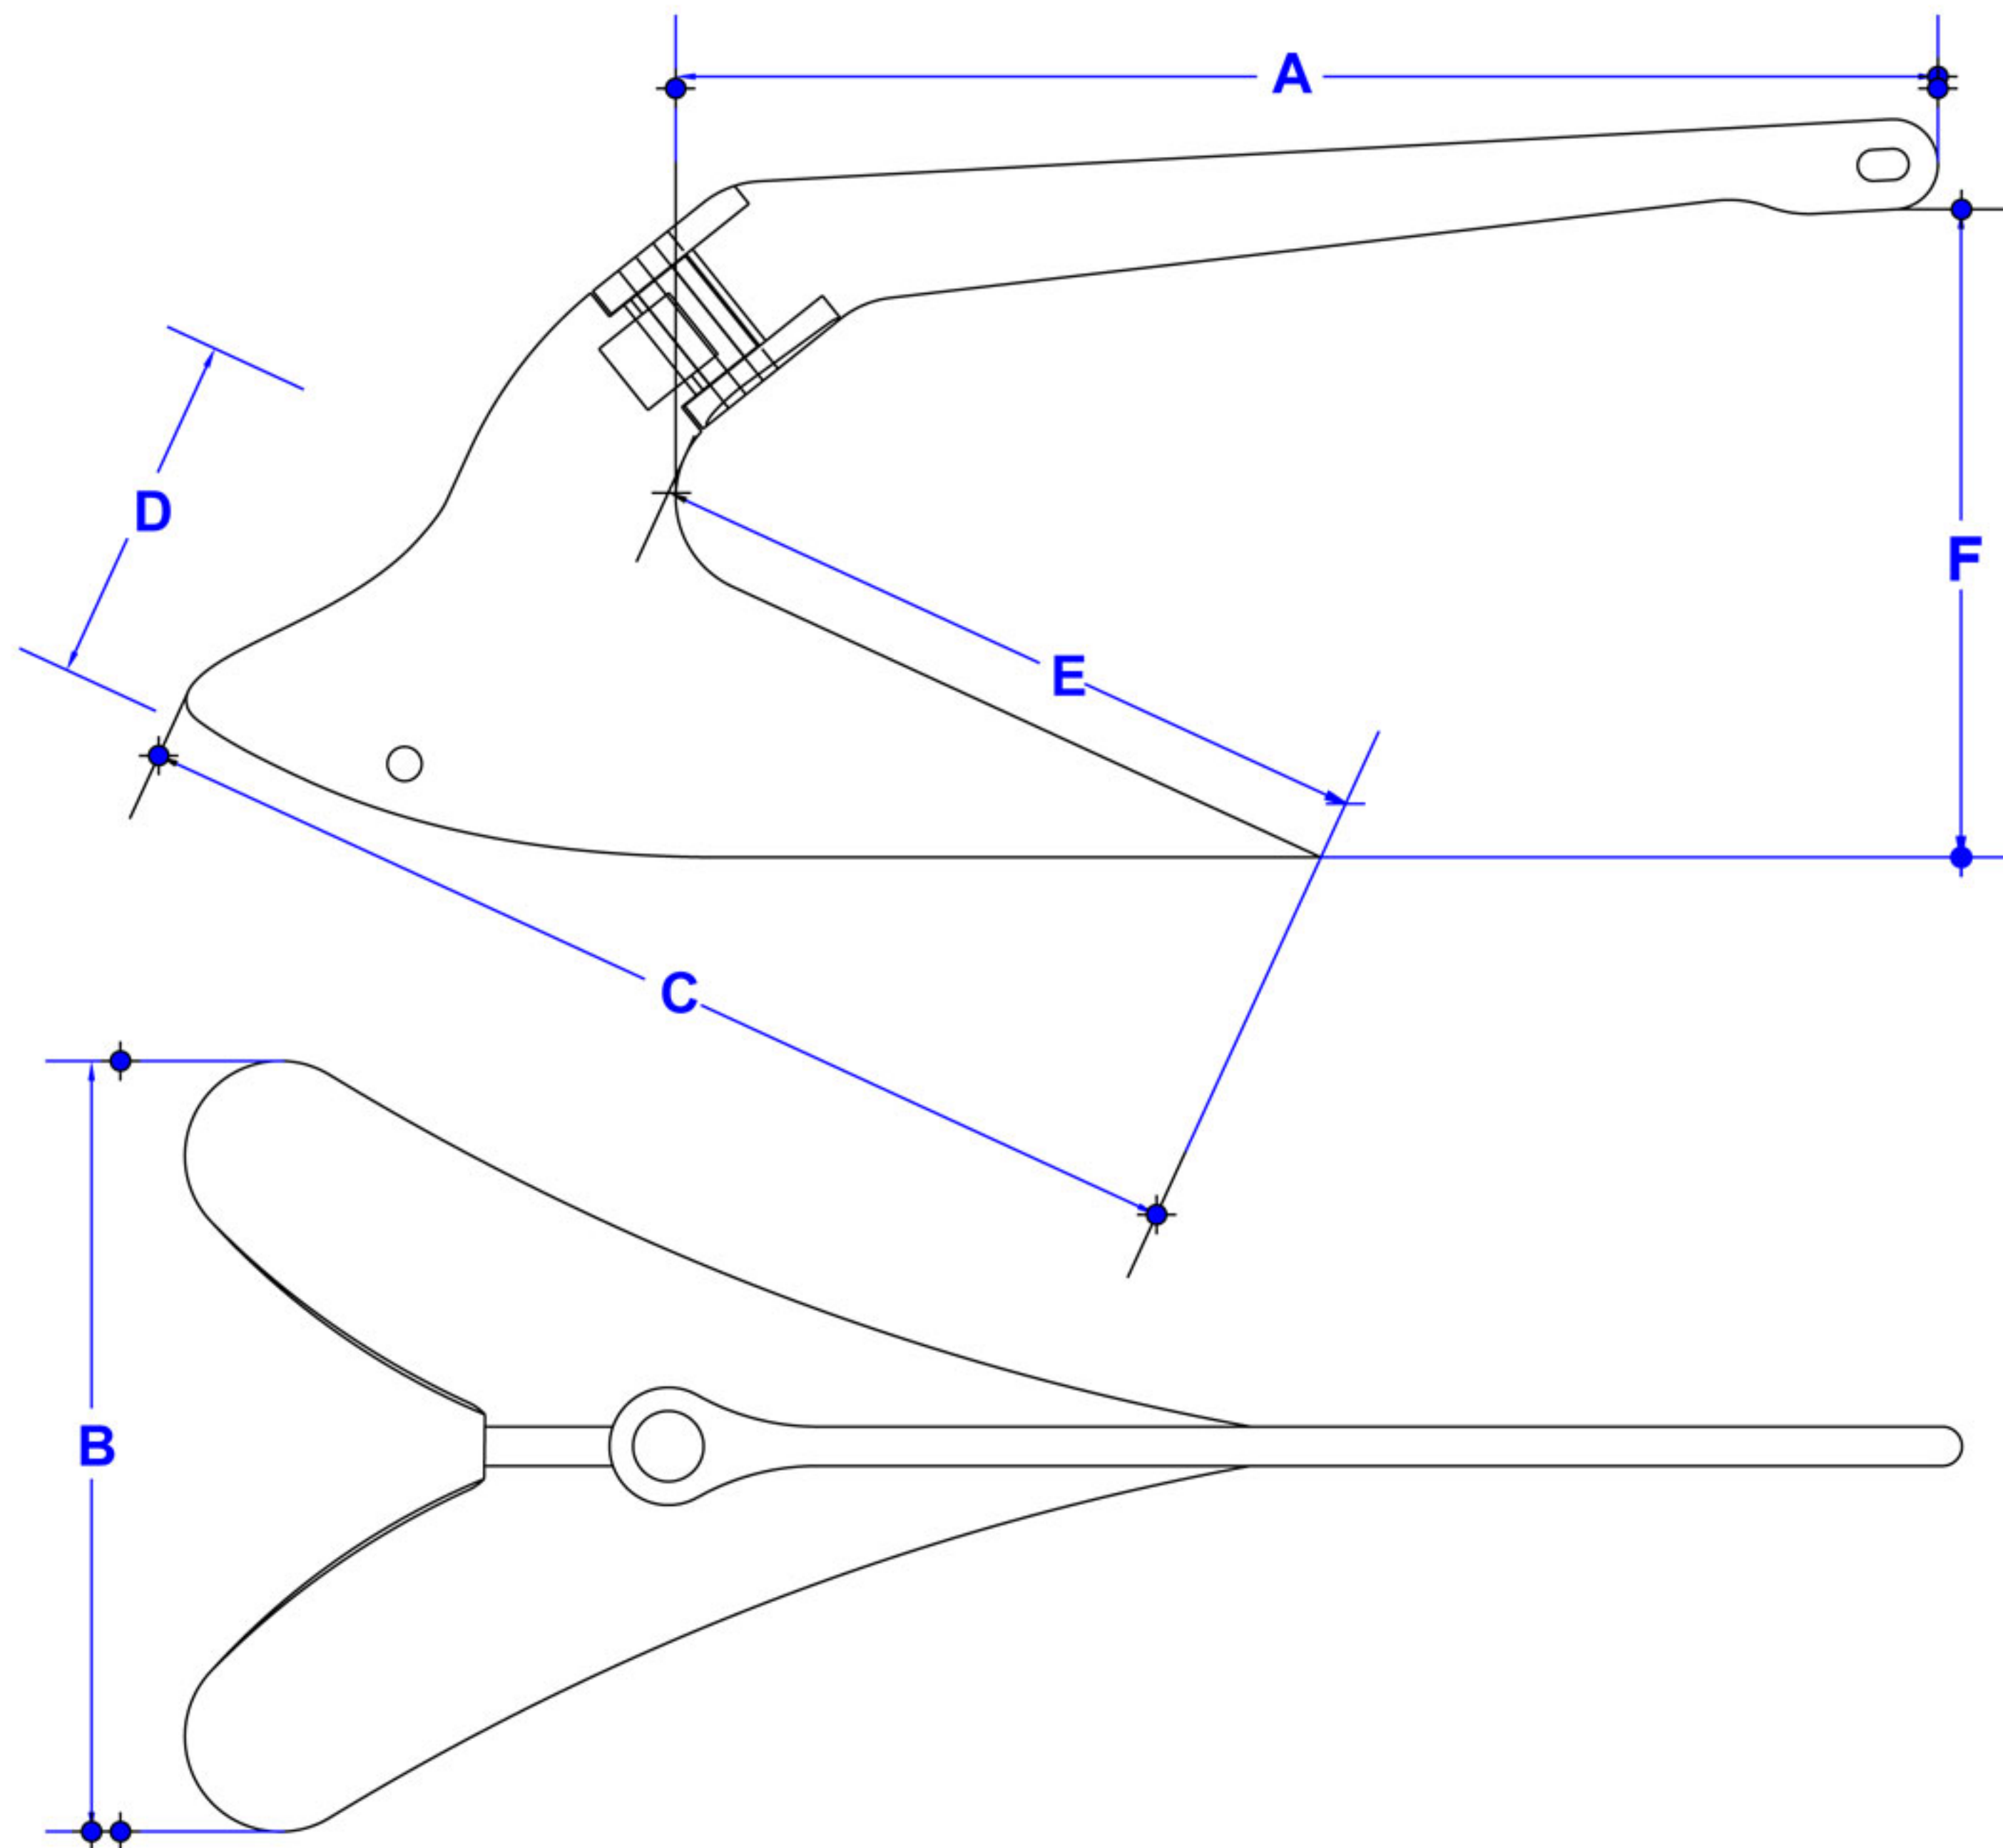

PLOUGH ANCHOR DIMENSIONS METRIC (mm)						
Weight lb	A	B	C	D	E	F
10	445	225	335	60	205	250
15	495	230	365	65	255	250
20	570	265	415	90	215	285
25	570	280	430	90	240	290
30	640	295	455	95	250	320
35	640	305	470	95	275	320
40	735	335	500	85	295	340
45	735	355	520	90	320	345
50	735	355	540	95	340	375
60	835	385	590	105	370	385
80	840	445	680	115	420	435
100	925	510	770	120	460	470
120	925	510	770	120	460	470
150	935	530	790	180	490	490
180	935	530	790	180	490	490
200	965	605	825	200	515	510
300	1150	730	995	250	620	610
350	1150	730	995	250	620	610

CUSTOM SIZING AVAILABLE UP TO 1000kg (2,200lbs)

PLEASE CONTACT FOR DIMENSIONS

PLOUGH ANCHOR DIMENSIONS (inches)						
lb	A	B	C	D	E	F
10	17 1/2	8 3/4	13 1/4	2 1/4	8	9 3/4
15	19 1/2	9	14 1/4	2 1/2	10	9 3/4
20	22 1/2	10 1/2	16 1/4	3 1/2	8 1/2	11 1/4
25	22 1/2	11	17	3 1/2	9 1/2	11 1/2
30	25 1/4	11 1/2	18	3 3/4	9 3/4	12 1/2
35	25 1/4	12	18 1/2	3 3/4	10 3/4	12 1/2
40	29	13 1/4	19 3/4	3 1/4	11 1/2	13 1/2
45	29	14	20 1/2	3 1/2	12 1/2	13 1/2
50	29	14	21 1/4	3 3/4	13 1/2	14 3/4
60	32 3/4	15 1/4	23 1/4	4 1/4	14 1/2	15 1/4
80	33	17 1/2	26 3/4	4 1/2	16 1/2	17 1/4
100	36 1/2	20	30 1/4	4 3/4	18	18 1/2
120	36 1/2	20	30 1/4	4 3/4	18	18 1/2
150	36 3/4	20 3/4	31	7	19 1/4	19 1/4
180	36 3/4	20 3/4	31	7	19 1/4	19 1/4
200	38	23 3/4	32 1/2	7 3/4	20 1/4	20
300	45 1/4	28 3/4	39 1/4	9 3/4	24 1/2	24
350	45 1/4	28 3/4	39 1/4	9 3/4	24 1/2	24

CUSTOM SIZING AVAILABLE UP TO 1000kg (2,200lbs)

PLEASE CONTACT FOR DIMENSIONS

IMPORTANT WARNING

DRAWINGS NOT TO BE USED
FOR CONSTRUCTION PURPOSES
DIMENSIONS TO BE CONFIRMED
BY MANSON BEFORE ORDERING

LLOYDS REGISTER OF SHIPPING APPROVED
CERTIFIED AS AN **HHP** ANCHOR
HIGH HOLDING POWER
COPYRIGHT 1981 - 2007

 MATERIALS: PIN SAF 2205 STAINLESS STEEL 316L DIMENSIONS in mm Tolerances +/- 0.3 unless otherwise stated			MANSON ANCHORS PLOUGH ANCHOR FOR SIZING SEE TABLE	
	DATE: 21 / 10 / 01	DRAWN: 3D Presentations	SIZE: A4	
	SCALE: N.T.S.	FILE: ANCHORS-00	SHEET: 1 of 1	
	CHECKED:	DWG No: Man-Plough-Gen	REVISION: 0	