
## Visi-Plus Light Sunscreen

Visi-Plus sunscreens are used for clear and safe vision in situations where sunshine an glare from outside need to be countered.

Visi-Plus Light is a good, economical and simple solution for a standard rolling system, which is easy to install.

#### Features:

- Simple solution for standard rolling system
- Several types of operations available
- Cord guided with a strong tension spring
- Chain guided with a synthetic chain
- Electrical guided with a 24Vdc tube motor.
- Maximum width of 4 meters and dropdown of 4 meters
- Two mounting brackets
- Using film with special advantages
- Reject up to 94.9% of the total solar energy
- Gives a better view by sunny or misty weather
- Create daytime privacy
- Reduce eye straining glare while maintaining the full view out
- Stop 99% of the harmful fade-causing ultraviolet rays, protecting all interior furnishings from sun damage
- Retain interior heat, similar to a second pane of glass
- Reduce air conditioning costs
- Improve living and working environmental conditions

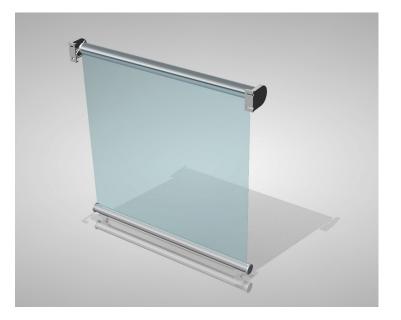



Visi-Plus Light with chain guided

# Visi-Plus Light


## DATA SUMMARY

## Maximum sunscreen dimension

- Length 4000mm
- Width 4000mm

## Window types

SQ, SQi, LH, LHi, RH, RHi, LRH, LRHi

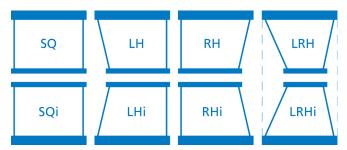

## **Control options**

- Manual Cord guided (CRD)
- Manual Chain guided (CH)
- Electrical Motor guided (E)

All control options can be ordered left- or right side.

## Motor specifications for Electrical Motor guided

<ul> <li>Brand</li> </ul>	
---------------------------	--

- Operations temperature
- Motor

Power supply

-10 to 60 <sup>0</sup>C IP30 24 VDC nominal (min. 20, max. 27 VDC)

Wireless remote control

+ up, - down


1999/5/EG

Somfy

- Complies with directive
- Option

## **Film specifications**

- Sheet thickness 100µm
   Lavers 3
- Layers Visible light transm.
- Visible light refl.
- Glare reduction
- UV transmission
- Solar energy refl. 22.4%
- Solar energy abs. 57.0%
- Total energy rej. 63.4%

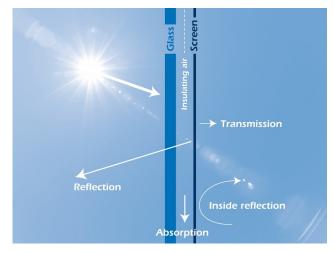

8.3%

8%

91%

<1%

#### Film and screen width

- Manual Cord guided (CRD) 16mm
- Manual Chain guided (CH) 16mm
- Electrical Motor guided (E) 18mm

## Compliance

The sunscreens comply with international rules and regulations for bridge division and bridge equipment NEN and IS 8468. All sunscreens are SI approved.